

PRECISION STEEL PARALLELS

'TOOLFAST' Steel Parallels are used as precision packing supports under jobs or fixtures. Made from tool steel, hardened, tempered & precision ground in matched pairs. Matched pairs are marked with identical serial numbers. All sides are chamfered. Overall sizes are nominal.

- ☐ **Hardened & Tempered 52 - 56 HRC.**
- ☐ **Parallelism within 0.005mm upto 200mm length.**
- ☐ **Inspection certificate is furnished.**

MODEL	SIZE	N.W. Kgs. (Per Pair)
TSP-20	10 x 20 x 150	0.47
TSP-35	15 x 35 x 150	1.24
TSP-45	20 x 45 x 200	2.80
TSP-55	25 x 55 x 250	5.34
TSP-60	30 x 60 x 300	8.50
TSP-75	45 x 75 x 300	15.80
TSP-75-450	45 x 75 x 450	23.70


EDGE FINDER

TOOLFAST' Edge Finder is used for fast and accurate location of starting point of work pieces with respect to the machine spindle on milling or jig boring machine tables.

Application: Edge finder is used for location of edges, shoulders, grooves etc. of work pieces kept on machine table with respect to the machine spindle. Shank of the Edge Finder is held in the collet or chuck and work table is traversed to cause the rotating tip of the edge finder make contact with the edge of the work piece to be located. Once the rotating tip comes in contact with the work piece, work table is further traversed so that the rotating tip shifts to a concentric position with respect to the shank. Now any movement to "off centre" will cause a distinct 'wobble'. At this point, the distance from the work edge to the centre of machine spindle is equal to half the diameter of the tip of the edge finder. Available in single & double ended tip. In double ended tip, Edge Finder can be held from both ends and both the tips of two different sizes can be used for edge finding.

Shank and tip of the edge finder are coupled together with the help of an internal spring for independent rotation of both. It is hardened and accurately ground all over to ensure repeatability of work location within 0.01 mm.

MODEL	SHANK DIA	TIP DIA	TYPE	N. W. Kgs.
EF-S1	10	10	Edge Finder-single end	0.03
EF-D1	10	5 & 10	Edge Finder-double end	0.03
EFR-10	10	10	Edge Finder-disc type	0.06
EFR-104	10	4 & 10	Disc Type - double end	0.06
TSEP-10	10	10	Ceramic Tip	0.03




New

GRINDING VICE - SCREW TYPE

'TOOLFAST' Grinding Vice - screw type is a precision machine vice. Body & jaw made of tool steel, hardened, tempered & precision ground.

- ☐ **Hardened & Tempered to 52 - 56 HRC.**
- ☐ **All sides Parallelism & Squareness within ± 0.005 mm.**
- ☐ **Inspection certificate is furnished.**




MODEL	JAW WIDTH	JAW DEPTH	MAX. JAW OPENING	OVERALL LENGTH	OVERALL HEIGHT	N. W. Kgs.
GV-65	63	32	85	190	65	4.4
GV-75	73	35	100	210	74	6.2
GV-90	88	40	125	250	88	10.0
GV-100	100	45	125	260	95	13.0
GV-125	125	50	158	300	110	20.0
GV-150	150	50	175	315	110	24.5

TOOL MAKER GRINDING VICE

Made of tool steel, precision ground.

All hardened and tempered 52-56 HRC having parallelism and squareness within ± 0.005 mm. Inspection Certificate furnished

MODEL	OVERALL WIDTH	JAW DEPTH	MAX. JAW OPENING	OVERALL LENGTH	N. W. Kgs.
TMGV-20	50	25	65	140	2.0
TMGV-30	73	35	100	190	4.1
TMGV-35	88	40	125	235	7.3
TMGV-40	100	45	125	245	10.0
TMGV-50	125	50	160	285	18.0




PRECISION SINE VICE

'TOOLFAST' Precision Sine Vice is used to obtain precise angles by means of gauge blocks. Apart from its use on milling and grinding machine, this Sine Vice can also be used as a reference for inspection.

- ☐ All Hardened & Tempered to 52 - 56 HRC.
- ☐ All side Parallelism & Squareness within $\pm 0.005\text{mm}$.
- ☐ Centre distance of rollers within $\pm 0.005\text{mm}$.
- ☐ Inspection certificate is furnished.

Chart for setting sine angles with the help of gauge blocks is provided.

MODEL	JAW WIDTH	JAW DEPTH	MAX. JAW OPENING	OVERALL LENGTH	OVERALL HEIGHT	N. W. Kgs.
PSV-2	50	25	65	140	80	3.2
PSV-3	73	35	100	190	104	7.2
PSV-4	100	45	125	245	134	16.5




PRECISION COMPOUND SINE VICE - SCREW TYPE

'TOOLFAST' Precision compound Sine Vice has compound sine angle setting on two sine plates. Both the tiltings are controlled by fine screws.

- ☐ All Hardened & Tempered to 52 - 56 HRC.
- ☐ All side Parallelism & Squareness within $\pm 0.005\text{mm}$.
- ☐ Centre distance of rollers within $\pm 0.005\text{mm}$.
- ☐ Inspection certificate is furnished.

Charts for setting both sine angles with the help of gauge blocks is provided.

MODEL	JAW WIDTH	JAW DEPTH	MAX. JAW OPENING	OVERALL LENGTH	OVERALL HEIGHT	N. W. Kgs.
CSGV-3	75	30	76	160	124	9.0



STEEL V-BLOCK

'TOOLFAST' Steel V-Blocks are made of tool steel, hardened, tempered & precision ground on all sides. These are supplied in matched pairs having both sides 'V' with one clamp.

- ☐ Unbreakable Steel Clamp.
- ☐ All Hardened & Tempered 52 - 56 HRC.
- ☐ Parallelism & Squareness of all faces & 'V' within $\pm 0.005\text{mm}$.
- ☐ Inspection certificate is furnished.

MODEL	LENGTH	HEIGHT	WIDTH	HOLDING CAPACITY Ø MAX	N. W. Kgs. (Pair with one clamp)
SVB-50	50	37	37	35	1.1
SVB-80	80	60	60	60	3.8
SVB-100	100	75	75	75	7.6
SVB-125	125	95	95	90	14.3
SVB-150	150	98	98	95	19.0



MAGNETIC V-BLOCK

'TOOLFAST' Magnetic V-Blocks are precision ground V-Blocks with high power magnets. Accurately fitted magnet ensures easy movement of knob. Available in single as well as matched pairs.

These V-blocks have main holding 'V' and bottom face fitted with hardened steel plates having hardness 52-56 HRC.

- ☐ Parallelism & Squareness of all faces & 'V' within $\pm 0.005\text{mm}$.
- ☐ Most suitable for inspection and tool room applications.
- ☐ Inspection certificate is furnished.




MODEL	LENGTH	HEIGHT	WIDTH	N. W. Kgs. (Pair)
MVB-4-H	100	95	75	9.0
MVB-6-H	150	95	75	13.5



LOCK DOWN JAW MACHINE VICE

FOR MACHINING CENTRE AND MILLING MACHINE

- ☐ Flame hardened bed
- ☐ Accuracy in Parallelism & Squareness within 0.02 mm
- ☐ No work piece tilt after clamping
- ☐ All parts interchangeable and available as spares
- ☐ Tenons and tenon slots provided for effortless truing of vice on machine table

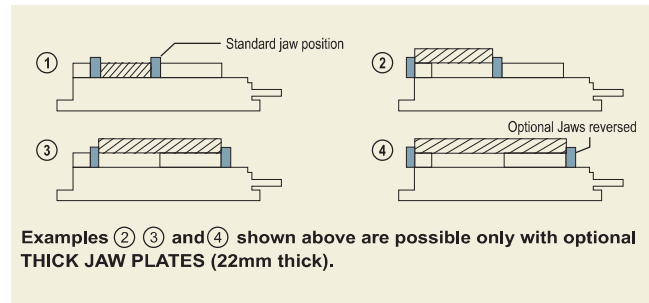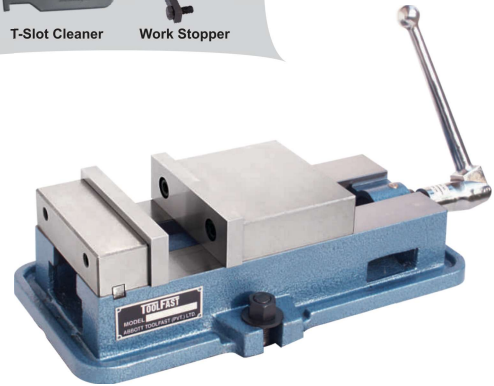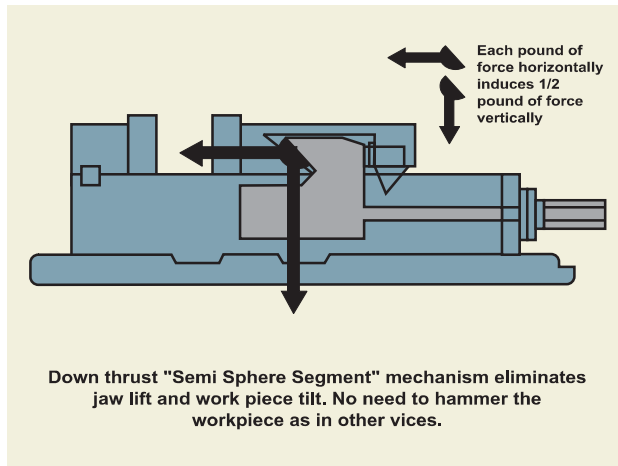

MODEL	JAW WIDTH	MAX. JAW OPENING WITH STANDARD JAW POSITION	MAX. JAW OPENING WITH JAWS REVERSED	JAW DEPTH	OVERALL LENGTH	OVERALL HEIGHT WITH SWIVAL BASE	OVERALL HEIGHT WITHOUT SWIVAL BASE	N.W. WITH SWIVAL BASE Kgs.	N.W. WITHOUT SWIVAL BASE Kgs.
MMV-6-HXL	160	190	395	48	430	160	115	49	38
MMV-8-H	210	210	480	60	550	190	145	80	62

*Required torque can be achieved by tightening handle included with vice. Applying extra torque by using extension pipe or by hammering damages the vice parts and warranty expires.

SWIVAL BASE

Available separately for above vices.



UNIVERSAL WORK STOP UWS-1

New

UWS-1 can be mounted anywhere on the machine T-slot table. Most suitable WORK STOP to be used with vices and fixtures or for workpieces clamped directly on the machine table.

Please specify T-slot size while ordering 12mm, 14mm, 16mm, or 18mm



OPTIONAL JAWS FOR MMV-6HXL

SERRATED JAW PLATE

Dimensions same as standard plain Jaw but having serrations for extra grip.



V-JAW PLATE

Total thickness = 40mm





MACHINABLE JAW PLATE

- Extra thick (48mm) for carving part shapes into jaw plate.
- Reversible top to bottom and front to back, (counter bore both sides) for customizing of four different applications.
- Available in **Aluminium or Steel**



PRECISION MODULAR VICE

All Steel Construction, all sides Hardened & Ground, most suitable for Machining Centre or Milling Machine

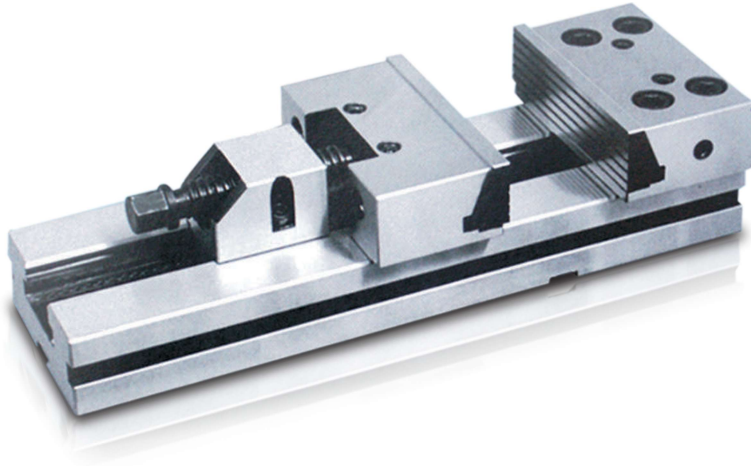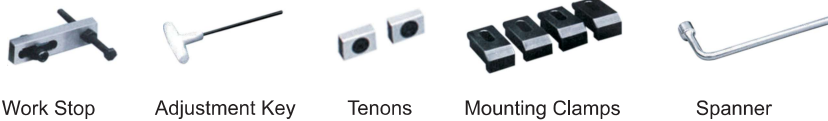
INCLUDED ACCESSORIES


- ☐ All parts interchangeable & modular, available as spares.
- ☐ High precision for Gang Operations.
- ☐ Parallelism & Squareness within $\pm 0.02\text{mm}$.
- ☐ Space Saving Design.
- ☐ High Clamping Force up to 4000 Kgs.
- ☐ Downhold clamping, No workpiece tilt after clamping.
- ☐ Tenons & Tenon slots provided for effortless trueing of vice on machine table.

Modularity


TOOLFAST Modular Vices are built from standardized modules that can be rearranged, combined, or replaced independently.

For TOOLFAST MODULAR VICES Jaws, Bases, and accessories can be swapped or extended

- You can extend length by adding base modules.
- You can switch jaws based on the workpiece (Intermediate Jaws, Prismatic Jaws, Magnetic Parallel Plates).
- Multiple vices can be mounted in series on the same machine table for larger or multiple parts.

TOOLFAST Modular Vices are extremely quick to adapt to many different machining jobs.

MODEL	JAW WIDTH	JAW DEPTH	MAX. JAW OPENING	OVERALL LENGTH	WEIGHT OF VICE (KGS)	TORQUE MAX. Nm	CLAMPING FORCE MAX. (KGS)
TPMV-125-150	125	40	150	345	13	60	2500
TPMV-150-200	150	50	200	420	25	80	3000
TPMV-150-300	150	50	300	520	29	80	3000
TPMV-175-300	175	60	300	555	42	80	3000
TPMV-175-400	175	60	400	655	47	80	3000
TPMV-200-300	200	65	300	595	69	120	4000
TPMV-200-500	200	65	500	795	79	120	4000

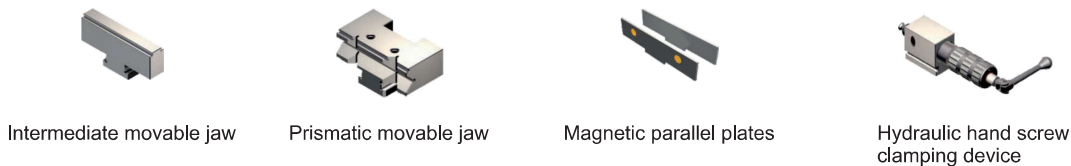OPTIONAL ACCESSORIES


Intermediate movable jaw

Prismatic movable jaw

Magnetic parallel plates

Hydraulic hand screw clamping device